



TV Meter (WiFi) Quick Start

1. Unpacking

Check that all these parts are present:

- Your Smart Penguin
- Carrying bag
- Power Adapter – 12V (2A)
- 2 Optical Receiver Connector Adapters


2. Powering up, and connecting to the device




1. Switch on the device from the start button:
2. While the operating system gets ready you will see the led indicator emitting orange color, once the system is ready the led status will be changed to green.
3. On your mobile device open your browser and type "tvmeter.com" and the device home page will appear.
4. Connect the coaxial cable to the RF port of the device and select the corresponding modulation from the home page.
5. The interface will change to display the measurements for the selected modulation.



3. Installing carriers

- Once you are in the modulation menu, input one of the frequencies from your network
- Select  and go to **Installation**
- Now select **Install**, and all carrier frequencies and services will be automatically installed on the device

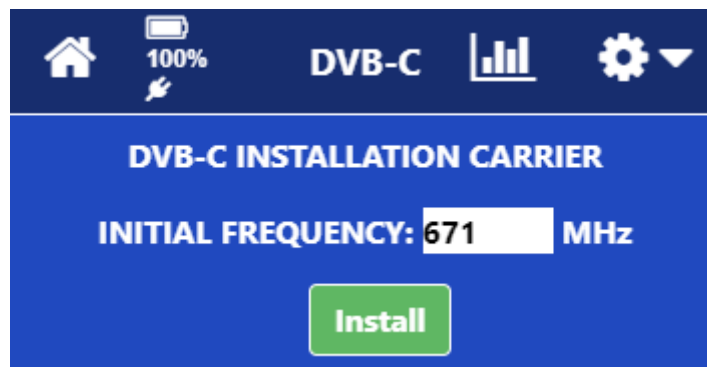

Please check the user manual for more information on how to communicate with your device and how to configure it.