



# TV Stream Monitor Quick Start

## 1. Unpacking

Check that all these accessories are present:

- 1 power supply cable
- 2 straight ethernet cable
- 1 quick start notice

## 2. Connecting to the embedded Web site



1. Connect the Ethernet cable between the RJ45 and the network.
2. The default IP address for **MANAGEMENT** port is **192.168.2.3**
3. The default IP address for **STREAM** port is **192.168.3.3**

**NOTE:** *Your computer should be in the same network.*

4. Open a Web browser (Internet Explorer, Mozilla...) and enter the device IP address. Login with the default username and password - (**admin/admin**). The home page of the embedded web site is displayed.

## 3. Adding new IP streams

- On the embedded web site home page, click "**Monitoring > +Add New**":
- Enter the new streams URL
- Enter a relevant name for the new stream
- Click the "**Add**" button, and the new stream will be monitored

**Monitoring Status**

07/06/2017 07:02:27


TV Streams			
Stream 2 5.9 Mbps udp://@:5003	Stream 3 5.9 Mbps udp://@:5005/	Stream 4 6.1 Mbps udp://@:6000/	Stream 5 5.9 Mbps udp://233.100.100.11:5003/

Copyright © Kvarta Soft Ltd. 2017

- Selecting a stream from this page will send you to the "**Details**" tab for that specific stream

#### 4. Look at current IP Stream status for parameter details

- On the embedded web site go to “Details”. Select which stream you would like to view
- Various info for the selected stream can be viewed like – MPEG tables, PID Statistics, Sections, etc.

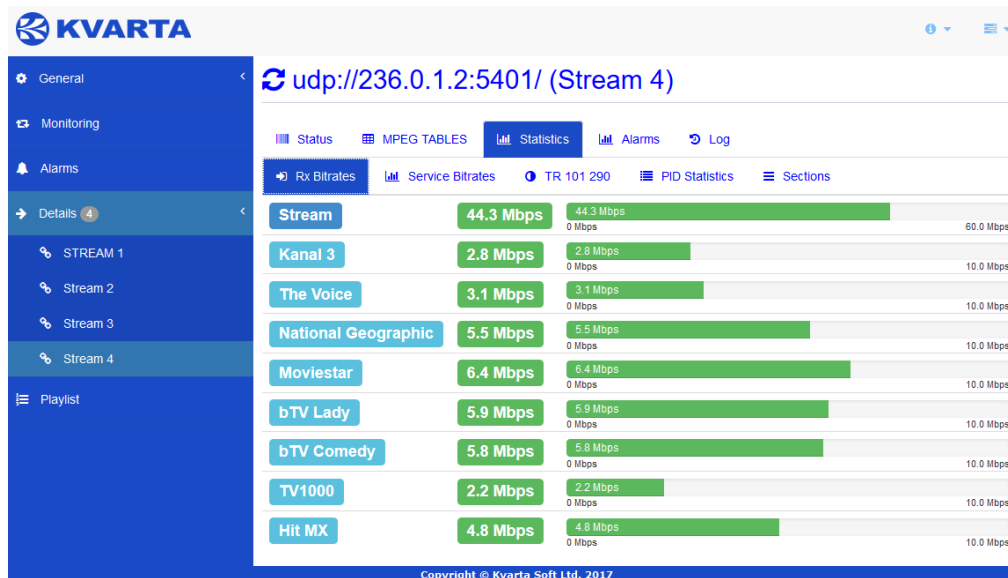

#### 5. Configuring the Alarms

- From the embedded web site home page, go to “Alarms”:
- Remember to “Save” any changes you’ve made to the alarms before proceeding to the next set of alarms
- Configure the Stream alarms
- Configure the Service alarms
- Configure the TR 101 290 alarms (if applicable)

	Alarm		Warning	
Min Bitrate:	10000 Kbps	<input checked="" type="checkbox"/>	1500 Kbps	<input type="checkbox"/>
Max Delay:	20 ms	<input checked="" type="checkbox"/>	10 ms	<input type="checkbox"/>
Max CC Errors:	20 errors	<input checked="" type="checkbox"/>	10 errors	<input type="checkbox"/>
Max RTP Errors:	20 errors	<input checked="" type="checkbox"/>	10 errors	<input type="checkbox"/>

**Please check the user manual for more information on how to communicate with your device and how to configure it.**